


# 703 / 704 Sliding door bathroom lock for frameless glass

- Suitable for frameless glass sliding doors, 8mm - 12mm thickness tempered glass
- Thumb turn / indicator display / coin release
- Standard lock is glass-to-wall, optional extra glass-to-glass keeper available
- Requires glass drilling & notching, see details below
- Supplied complete with fixing screws, gaskets & allen key
- Material solid brass, standard finish: Satin Nickel
- Additional finishes available: Polished Chrome, Polished Brass, Oil Rubbed Bronze

## 703 Bathroom lock:

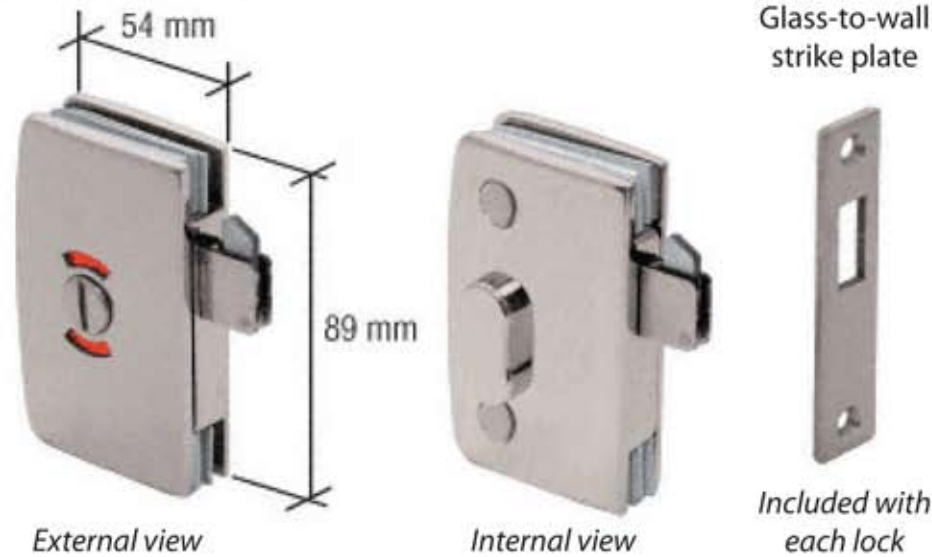

## 704 Keeper:

Glass-to-glass keeper



## 703 / 704 GLASS TEMPLATE

### Notes:

- Both the door and fixed panel use the same template.

- When using glass-to-wall fixing, the minimum clearance between the door glass and the wall/timber is 3mm, and the maximum clearance is 12mm. The standard recommended clearance is 5mm.

- When using glass-to-glass fixing, the clearance between panels is 1.5mm to 3mm.

