
SF-A90


saheco
sistemas para puertas correderas


Poligono Industrial Foradada - 08580 - Sant Quirze de Besora (Barcelona) Telf. 34-93.852.92.23
Export. Telf. 34-93.852.96.15
e-mail: saheco@saheco.com - web: www.saheco.com

MADE IN E.U.
GRUPO TORREMAT
MAX. 90 kg

JUN.2025
038060850


X		1
Y		8

G	DIN 7505-B 5X25mm	8
H	DIN 7505-A 4X20mm	4
I	DIN 7982 4,2x16mm	1
J		1

K		1
R		1
S		1
T		2


U		2
V		2
W		2

CEILING MOUNT

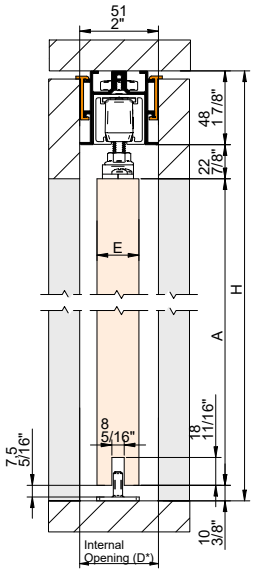


A=H-80
A=H-3 1/8"

FALSE CEILING MOUNT

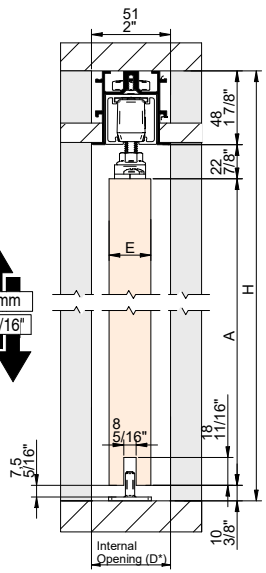

A=H-80
A=H-3 1/8"

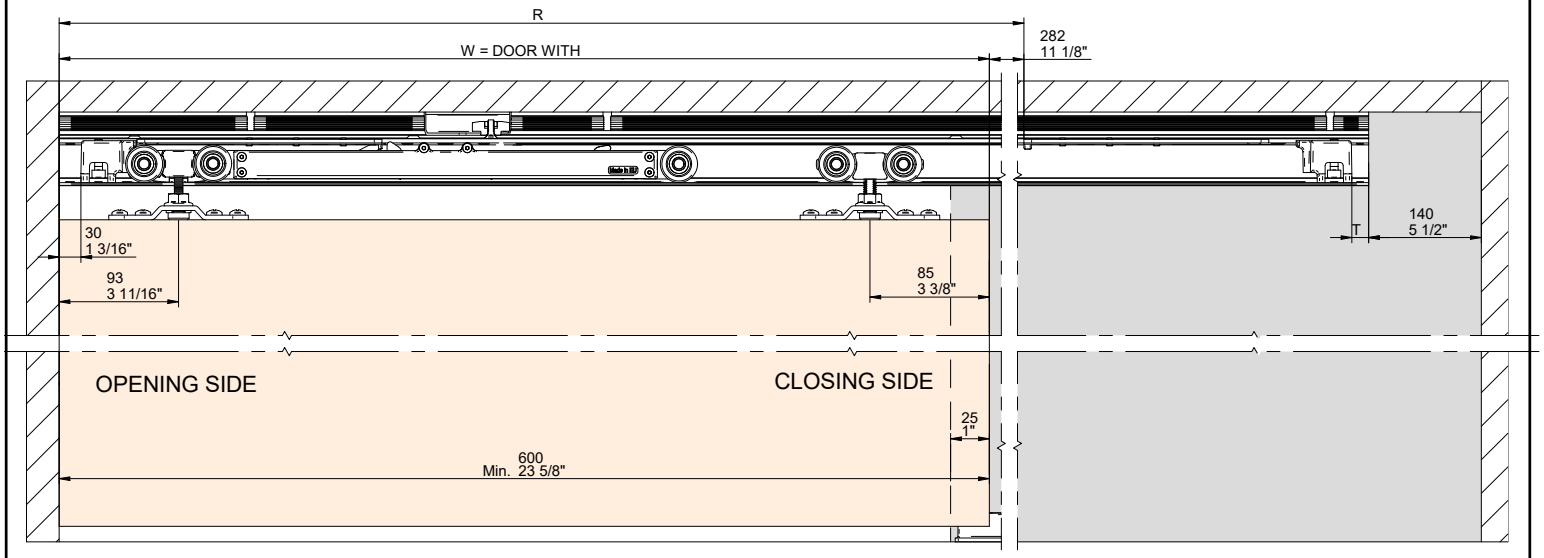

D* = E + 11mm
*Min 51mm


D* = E + 7/16"
*Min 2"

LEVELED ASSEMBLY



T= 20 | R= W + 282
T= 13/16" | R= W + 11 1/8"

OVERLAP ASSEMBLY




T= 20 + S | R= W + 282 + S
T= 13/16" + S | R= W + 11 1/8"+ S


(2) ASSEMBLY PROFILES

X= Y + 165
W= Y + 25
K= (Yx2) + 25

X= Y + 6 1/2"
W= Y + 1"
K= (Yx1/16") + 1"

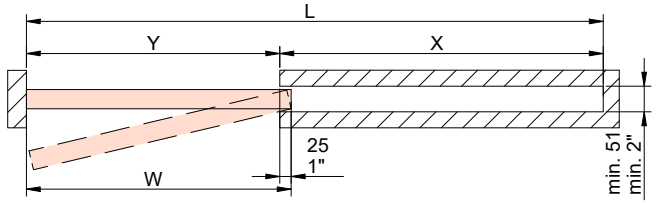

Y= Clear opening
W= Door

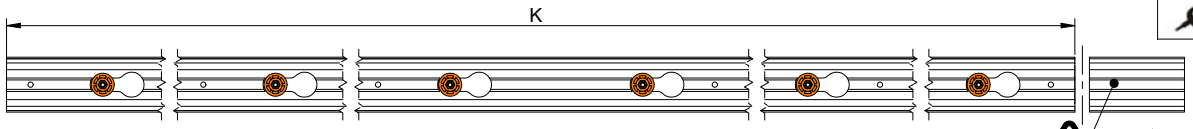


CUT PROFILE ALWAYS ON THIS SIDE




(Ymm)	(Y ")	(Zmm)	(Z") MIN.
1100	43 5/16"	2100	82 11/16"
1200	47 1/4"	2100	82 11/16"
1300	51 3/16"	2300	90 9/16"
1400	55 1/8"	2500	98 7/16"
1500	59 1/16"	2700	106 5/16"
1600	63"	2800	110 1/4"
1700	66 15/16"	3000	118 1/8"
1800	70 7/8"	3400	133 7/8"

K≤D - 110
K≤D - 4 5/16"

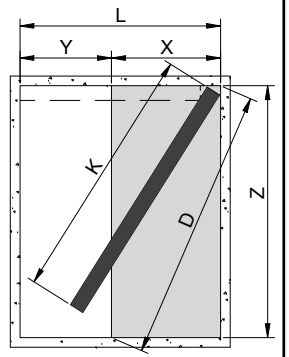


A3H

3 ASSEMBLY COMPONENTS

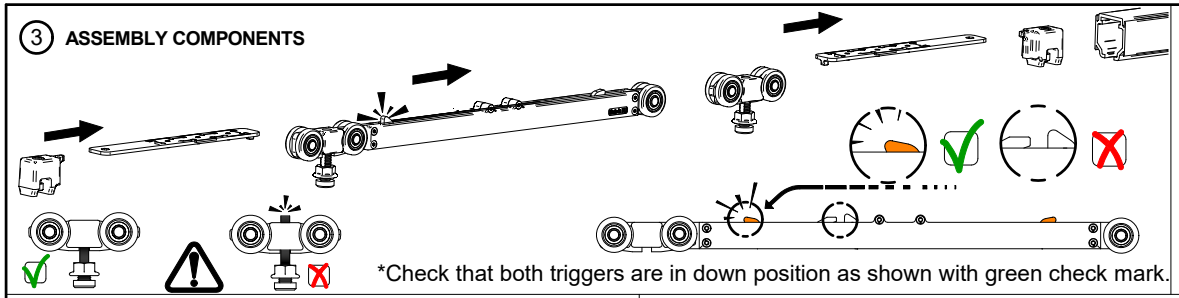


*Check that both triggers are in down position as shown with green check mark.


4 STOPPER

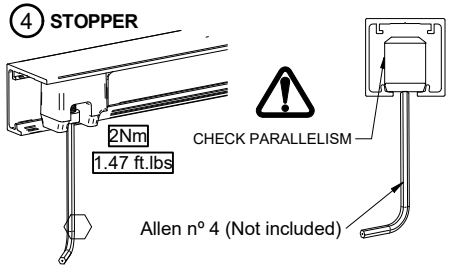


5 ASSEMBLY ACTIVATORS

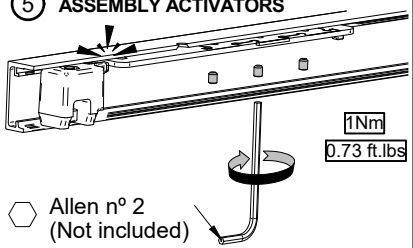


6 FIX SUPPORT TOP TRACK TO CEILING

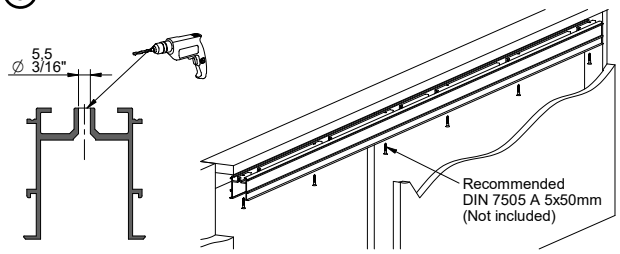


7 ACCOMODATE THE MAIN TOP TRACK TO SUPPORT TOP TRACK ALREADY FIXED

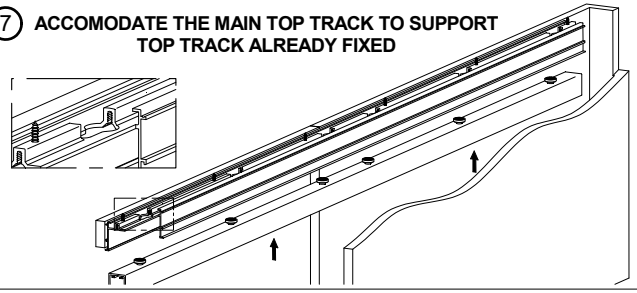


8 INSERT INTO SLOTS

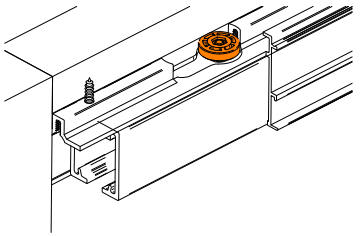


9 SLIDE UNTIL LIMIT

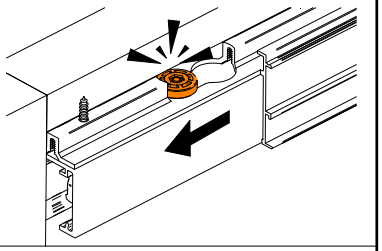


10 FIX THE TWO SCREWS (Z) IN THE CLEAR OPENING TO JOIN TRACKS

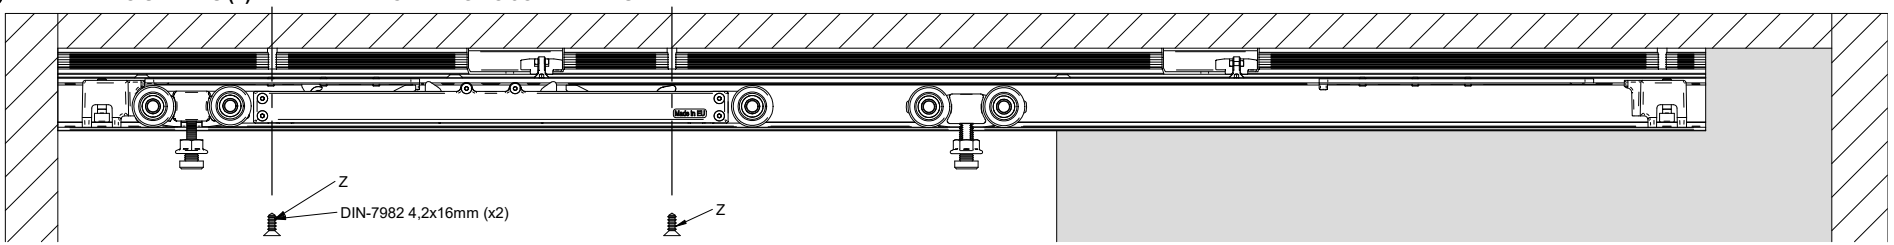


11 SURFACE FIX PLATES TO



12 HANG DOOR AND ADJUST HEIGHT

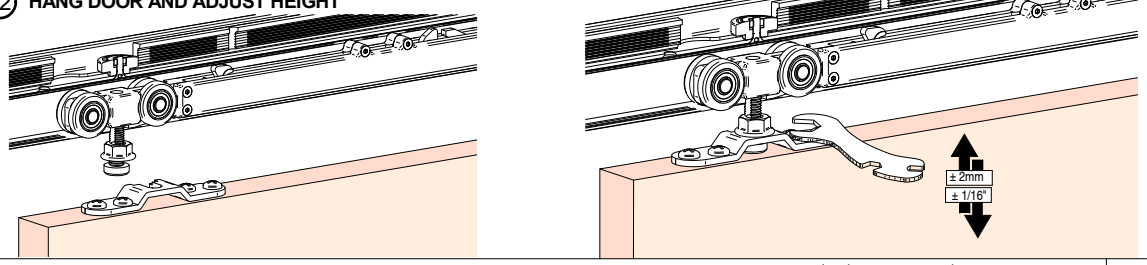


13 INSTALL BOTTOM GUIDE




14 CLIP ON BRACKET FOR TIMBER PELMET

3M (118")	8

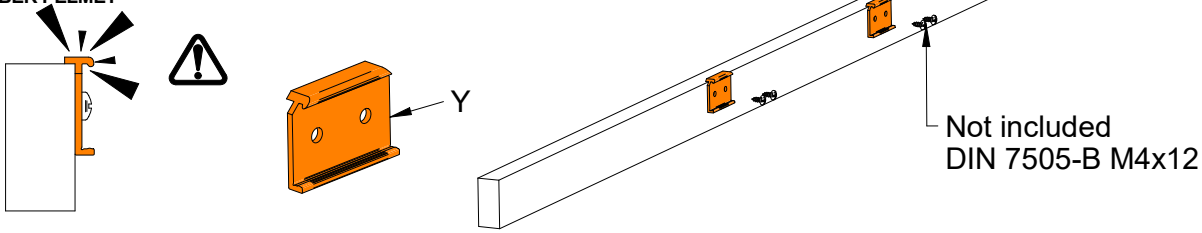

15 CEILING MONUT: COVER CLIPPING



A3H