



Tools needed



N 6548

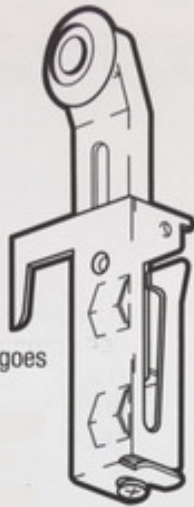

Connector arm goes on rail.

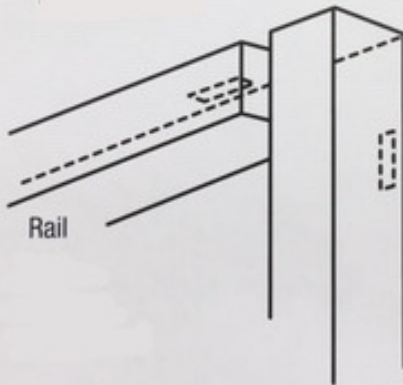

Depress this tab to remove old guide.

Remove door from track by pushing up track guides with a screwdriver. Swing door out and up to remove. Depress the locking tab with a screwdriver on side of rail and remove assembly. Insert new roller into top rail; be sure to replace the new roller in same manner in which the old one was removed (parts are marked left or right). Hang door; push guides down to engage track, adjusting for smooth operation.